


MIL-DTL-26482 TYPE, DC SERIES  
(COMMERCIAL EQUAL - HERMETIC)

PART NUMBERING SYSTEM

DC 1 H - 10 - 6 P N - \*\*\*

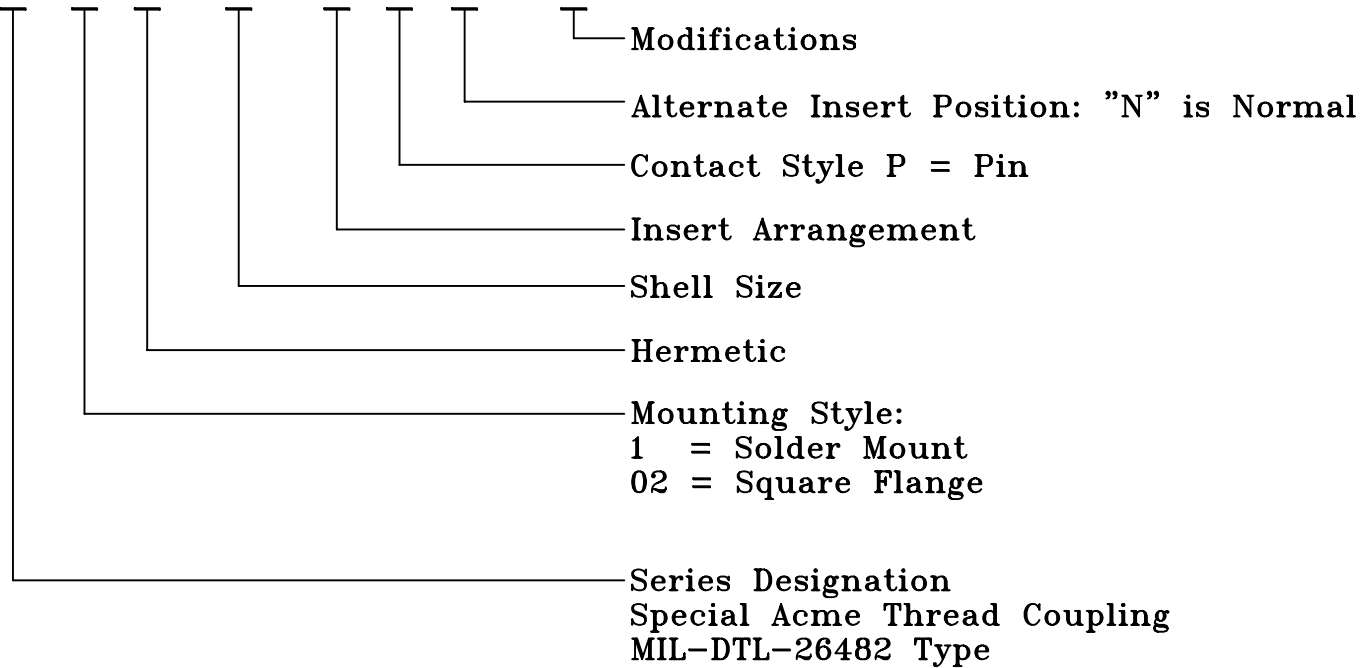

GENERAL SPECIFICATIONS

MATERIAL

Shell, Key and Flange: Carbon Steel  
Pins: 52 Nickel Alloy  
Seals: None  
Insulator: Glass

CURRENT RATING

Size 20: 5 AMPS

AIR LEAKAGE

1x10<sup>-6</sup> CM<sup>3</sup>/SEC AT 15psi

INSULATION RESISTANCE

5,000 megohms AT 500VDC

OPERATING TEMPERATURE

-67°F TO +257°F (-55°C TO +125°C)

STANDARD PIN IS SOLDER CUP TYPE. OTHER PIN TYPES ALSO AVAILABLE  
(EYELET, STRAIGHT, THERMOCOUPLE) - CONSULT FACTORY.

STANDARD FINISH IS TIN PLATED SHELL AND PINS.  
OTHER FINISHES ALSO AVAILABLE (GOLD, NICKEL, OLIVE DRAB, etc.) - CONSULT FACTORY.

SPECIALS CAN BE SUPPLIED TO MEET CUSTOMER SPECIFICATIONS - CONSULT FACTORY.

**DETORONICS CORPORATION**  
10660 EAST RUSH STREET, SO. EL MONTE, CA 91733  
TELE: (626) 579-7130 FAX: (626) 579-1936  
[www.detoronics.com](http://www.detoronics.com)