
MIL-DTL-38999 SERIES II TYPE, DJ SERIES (COMMERCIAL EQUAL - HERMETIC)

PART NUMBERING SYSTEM

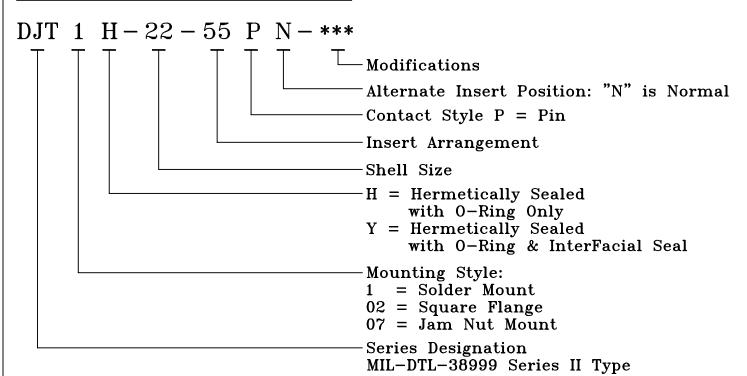

GENERAL SPECIFICATIONS

MATERIAL CURRENT RATING

Shell, Bayonet and Flange: Carbon Steel Size 22: 3 AMPS
Pins: 52 Nickel Alloy Size 20: 5 AMPS

Pins: 52 Nickel Alloy Size 20: 5 AMPS Seals: Silicone 0-Ring Only Size 16: 10 AMPS

Insulator: Glass

AIR LEAKAGE INSULATION RESISTANCE OPERATING TEMPERATURE

 1×10^{-7} CM³/SEC AT 15psi 5,000 megohms AT 500VDC 39°F TO +201°F (4°C TO +90°C)

STANDARD PIN IS SOLDER CUP TYPE. OTHER PIN TYPES ALSO AVAILABLE (EYELET, STRAIGHT) - CONSULT FACTORY.

STANDARD FINISH IS TIN PLATED SHELL AND PINS.
OTHER FINISHES ALSO AVAILABLE (GOLD, NICKEL, OLIVE DRAB, etc.) - CONSULT FACTORY.

SPECIALS CAN BE SUPPLIED TO MEET CUSTOMER SPECIFICATIONS - CONSULT FACTORY.

OUR CONNECTORS MATE WITH ANY PLUG WITH SOCKET CONTACTS WHICH MEET THE DIMENSIONAL REQUIREMENTS OF MIL-DTL-38999 AND MS27484.

DETORONICS CORPORATION
10660 EAST RUSH STREET, SO. EL MONTE, CA 91733
TELE: (626) 579-7130 FAX: (626) 579-1936
www.detoronics.com