


MIL-DTL-26482 TYPE, DT SERIES
(COMMERCIAL EQUAL - HERMETIC)

PART NUMBERING SYSTEM

DT 1 H - 22 - 55 P N - ***

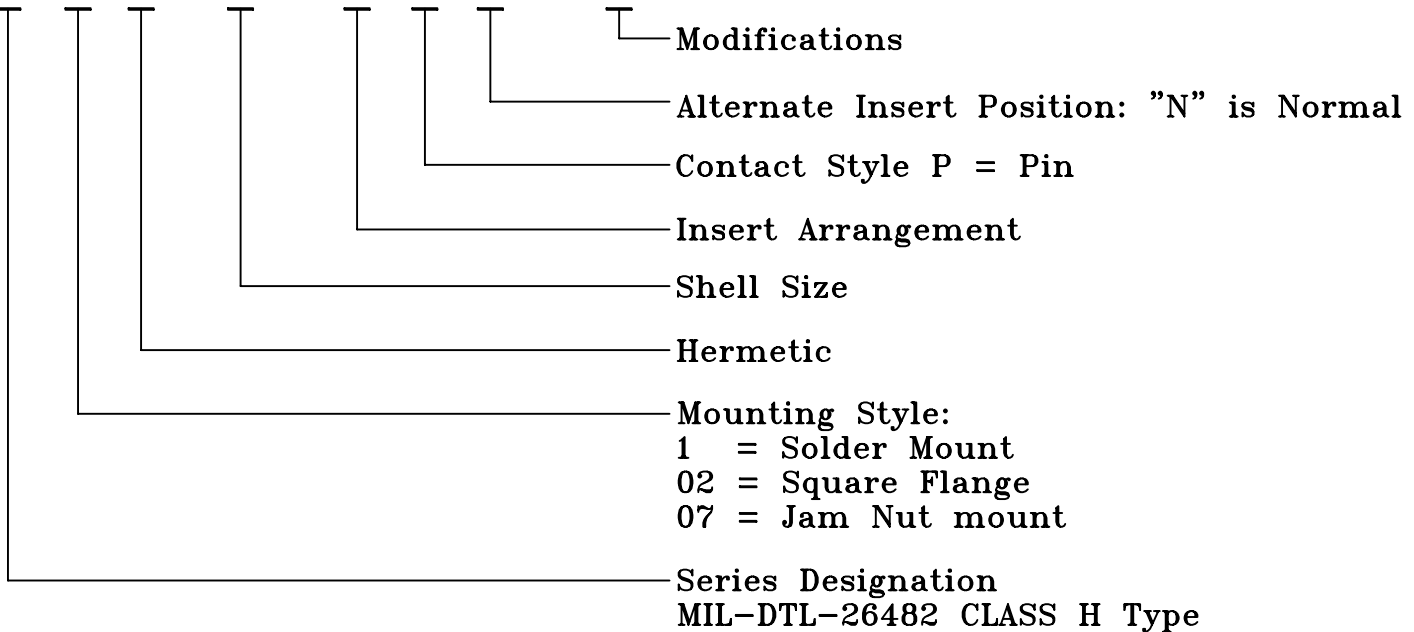

GENERAL SPECIFICATIONS

MATERIAL

Shell, Bayonet and Flange: Carbon Steel
Pins: 52 Nickel Alloy
Seals: Silicone O-Ring only
Insulator: Glass

CURRENT RATING

Size 20: 5 AMPS
Size 16: 10 AMPS

AIR LEAKAGE

1x10⁻⁶ CM³/SEC AT 15psi

INSULATION RESISTANCE

5,000 megohms AT 500VDC

OPERATING TEMPERATURE

-67°F TO +257°F (-55°C TO +125°C)

STANDARD PIN IS SOLDER CUP TYPE. OTHER PIN TYPES ALSO AVAILABLE
(EYELET, STRAIGHT, THERMOCOUPLE) - CONSULT FACTORY.

STANDARD FINISH IS TIN PLATED SHELL AND PINS.
OTHER FINISHES ALSO AVAILABLE (GOLD, NICKEL, OLIVE DRAB, etc.) - CONSULT FACTORY.

SPECIALS CAN BE SUPPLIED TO MEET CUSTOMER SPECIFICATIONS - CONSULT FACTORY.

OUR CONNECTORS MATE WITH ANY PLUG WITH SOCKET CONTACTS WHICH MEET
THE DIMENSIONAL REQUIREMENTS OF MIL-DTL-26482 AND MS3116.

DETORONICS CORPORATION
10660 EAST RUSH STREET, SO. EL MONTE, CA 91733
TELE: (626) 579-7130 FAX: (626) 579-1936
www.detoronics.com