


DX SERIES
MIL-DTL-26500 AND MIL-DTL-83723 SERIES III TYPE
 (COMMERCIAL EQUAL - HERMETIC)

PART NUMBERING SYSTEM

DX 1 H - 22 B - 55 P N - ***

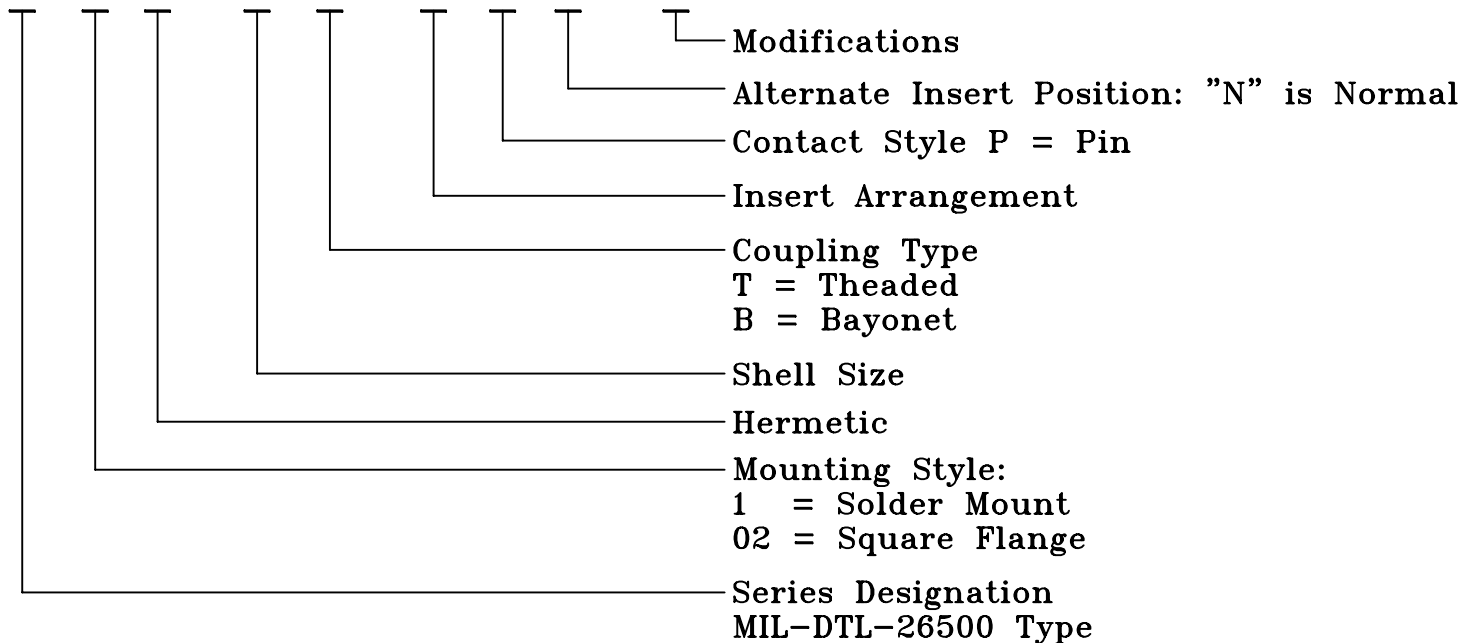

GENERAL SPECIFICATIONS

MATERIAL

Shell and Flange: Carbon Steel
 Pins: 52 Nickel Alloy
 Seals: Silicone Interfacial Seal and O-Ring
 Insulator: Glass

CURRENT RATING

Size 20: 5 AMPS
 Size 16: 10 AMPS

AIR LEAKAGE

1x10⁻⁷ CM³/SEC AT 15psi

INSULATION RESISTANCE

5,000 megohms AT 500VDC

OPERATING TEMPERATURE

-67°F TO +500°F (-55°C TO +260°C)

STANDARD PIN IS EYELET TYPE. OTHER PIN TYPES ALSO AVAILABLE
 (SOLDER CUP, STRAIGHT, THERMOCOUPLE) - CONSULT FACTORY.

MIL-DTL-83723 SERIES III INTERMATEABLE WITH MIL-DTL-26500.

STANDARD FINISH IS TIN PLATED SHELL AND PINS.
 OTHER FINISHES ALSO AVAILABLE (GOLD, NICKEL, OLIVE DRAB, etc.) - CONSULT FACTORY.

SPECIALS CAN BE SUPPLIED TO MEET CUSTOMER SPECIFICATIONS - CONSULT FACTORY.

OUR CONNECTORS MATE WITH ANY PLUG WITH SOCKET CONTACTS WHICH MEET THE DIMENSIONAL
 REQUIREMENTS OF MIL-DTL-26500 AND MS24266B AND MS24266T.

DETORONICS CORPORATION
 10660 EAST RUSH STREET, SO. EL MONTE, CA 91733
 TELE: (626) 579-7130 FAX: (626) 579-1936
www.detoronics.com